LOCAL RIDE KIT™

Riding Essentials

Part #7102601


GRID MTB SEAT BAG


Installation: Lace Velcro strap through seat rails. Insert strap through 'D' ring. Cinch the bag up as high as it will go. Do not over-tighten.


- Do not over stuff the bag.
- Do not leave valuables unattended.



WARNING: Always make sure that the bag does not interfere with controls.



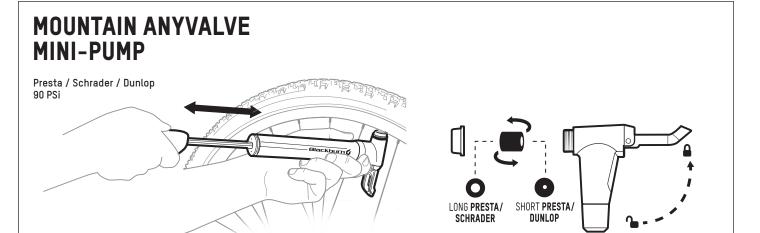




TIRE LEVERS

Removing the tire:

Insert the flat part of the lever between the tire sidewall and wheel rim. Pull down on the lever to pry up the sidewall and attach the hooked end of the lever to a wheel spoke. Slip the second lever into the space you just pried up next to the first lever. Pull down on the lever to push up the tire sidewall. Grip the wheel firmly and slide the second lever along the wheel rim.





WARNING: Tire levers are recommended when removing bike tires and tubes to avoid damage. Do not use a sharp tool. Do not over inflate tires. See tire sidewall for proper PSI.



Customer Service: 1-800-456-2355

Blackburndesign.com

